


## Pt1000TGL40/M, 1m, MiniDIN

Code: SN185M

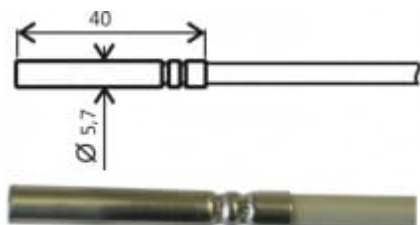

IP67 protection, operating range -30°C to +80°C.  
17241 stainless steel, 1m PVC shielded cable, operating range -30°C to +80°C, MiniDIN connector.

Case diameter 5.7mm, length 40mm.

Response time  $t_{63} < 10s$ ,  $t_{95} < 30s$ .

1m/s air flow response time  $t_{63} < 60s$ ,  $t_{95} < 150s$ .

Code

TEMPERATURE SENSOR	
Measuring range	-30 to +80 °C
Accuracy	$\pm (0.15 + 0.002 t)$ at °C
Accuracy class	A
Time response	$t_{0.5} < 7 s$ (in flowing water at $> 0.2 m/s$ ) $t_{63} < 10s$ , $t_{95} < 30s$ (in liquid) $t_{63} < 60s$ , $t_{95} < 150s$ (air flow 1m/s)
Type of sensing element	Pt1000
Temperature coefficient	3850 ppm / °C
GENERAL TECHNICAL DATA	
Wire connection	2-wire connection
Material of the case	stainless steel DIN 1.4571
Dimensions of the case	length 40 mm; diameter $5.7 \pm 0.1 mm$
Lead-in cable	PVC shielded
Length of lead-in cable	1 meter
Connector	MiniDin
IP protection	IP67
Warranty	30 months