


Pt1000TR160/E, 15m, ELKA

Code: SN203E

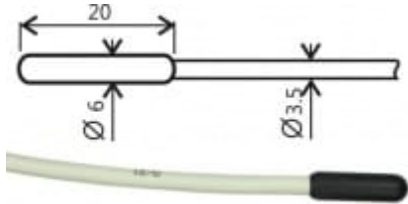

IP protection (IP67) and operating temperature range: -30°C to +80°C.

Accuracy: $t = \pm(0.30 + 0.005 \cdot |t|)$ - class B according to IEC 751.

Lead-in cable: 15m PVC shielded

Dimensions: case diameter 6mm, case length 20mm, cable diameter 3.5mm. ELKA connector.

Table

TEMPERATURE SENSOR	
Measuring range	-30 to +80 °C
Accuracy	$\pm (0.3 + 0.005 t)$ at °C
Accuracy class	A
Time response	$t_{0.5} < 12$ s (in flowing water at > 0.2 m/s) $t_{50} < 12$ s, $t_{90} < 32$ s (in liquid)
Type of sensing element	Pt1000
Temperature coefficient	3850 ppm / °C
GENERAL TECHNICAL DATA	
Wire connection	2-wire connection
Material of the case	POLYAMIDE-based plastic
Dimensions of the case	length 20 mm; diameter 5.7 ± 0.1 mm
Lead-in cable	PVC shielded
Length of lead-in cable	15 meters
Connector	ELKA
IP protection	IP67
Warranty	30 months